

RhinoAg: **Class B** Implements

▶ **60-100** HP Tractors



Equipment designed specifically for **your tractor's horsepower**. Every RhinoAg® implement you can pull is here for easy browsing, with no distractions from products that won't fit your tractor. This curated list is designed to make it simple for you to find the best RhinoAg implement for your needs.



Built Rhino tough.



4150

Twister 20 Series®

Single-Spindle Rotary Cutter | **TW25** | **TW26** | **TW27** | **TW27DTW**

Have the confidence to mow the most challenging terrain.

The Twister 20 Series offers the same Twister quality with a bigger bite. With cutting widths up to 84" and up to CAT 3 compatibility, the Twister 20 is practically a universal tool at an incredibly affordable price. Whether you're mowing down a road shoulder or clearing brush off the back forty, the Twister 20 is the cutter for the job!

No job is too large for the Twister Series single-spindle rotary cutter. CAT 1, CAT 2, and CAT 3 compatibility ensures it will play well with whatever tractor you're driving, while a heavy-duty tailwheel and 2" cutting capacity promise nothing will be left standing in its wake!

The Twister 20 Series boasts a high-capacity cutting chamber under a baffled deck with tapered side-skirts to help prevent gouging so you can cut what you want, when you want with no complaint from your rotary cutter.

Features & Benefits

- Steel infinity blade carrier
- Heavy-duty tailwheel
- Available in 5', 6' and 7' cutting widths

Who Should Buy:

Farms, Ranches,
Homesteads



Twister 20 Series®

Single-Spindle Rotary Cutter | TW27

Standard Equipment & Specifications

| | TW25 | TW26 | TW27 | TW27DTW |
|--|--|--|---------------------------------------|---------------------------------------|
| Cutting Width | 60" | 72" | 84" | 84" |
| Overall Width | 64 1/4" | 76 1/4" | 88 1/4" | 88 1/4" |
| Overall Length | 108" | 118" | 135" | 135" |
| Cutting Height (Min) | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" |
| Hitch | CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™* | CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™* | CAT 2/CAT 3 Std., CAT 2/CAT 3 Q.H. | CAT 2/CAT 3 Std., CAT 2/CAT 3 Q.H. |
| Blade Carrier | Infinity - Steel | Infinity - Steel | Infinity - Steel | Infinity - Steel |
| Blades | 1/2" x 3" | 1/2" x 3" | 1/2" x 3" | 1/2" x 3" |
| PTO HP Required (Min) | 25 | 35 | 45 | 45 |
| Gearbox Rating** | 65 HP | 65 HP | 130 HP | 130 HP |
| Blade tip Speed (FPM) | 14,335 | 14,963 | 14,369 | 14,369 |
| Cutting Capacity | 2" | 2" | 2" | 2" |
| Driveline Size | CAT 3 | CAT 3 | CAT 4 | CAT 4 |
| Driveline Protection | Slip Clutch | Slip Clutch | Slip Clutch | Slip Clutch |
| Deck Thickness | 12 Ga | 12 Ga | 12 Ga | 12 Ga |
| Side Skirt | 7 Ga | 7 Ga | 7 Ga | 7 Ga |
| Tire and Wheel | 4" x 8" Laminated | 4" x 8" Laminated | 4" x 8" Laminated | (2) 4" x 8" Laminated |
| Safety Deflector | Deflectors or Chains | Deflectors or Chains | Deflectors or Chains | Deflectors or Chains |
| Weight (Approx) -with Rubber Deflectors | 720 lbs | 800 lbs | 1105 lbs | 1255 lbs |
| Weight (Approx) -with Chains | 760 lbs | 865 lbs | 1180 lbs | 1330 lbs |

* iMatch™ is a trademark of Deere & Company

** Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261



Twister 30 Series®

Single-Spindle Rotary Cutter | **TW35** | **TW36**

Show brush who's boss—without the buildup. The TW35 and TW36 are the latest additions to the Twister Series of single-spindle rotary cutters. They're the first in the series to have a smooth, totally domed deck, helping reduce grass and debris buildup as you work. With their 1/2" x 4" updraft blades and impressive 3" cutting capacity, these 5' and 6' monsters are eager to show brush who's boss—without slowing you down in the process.

Features & Benefits

- Infinity cast blade carrier
- 3" cut capacity
- CAT 1 and CAT 2 standard and quick hitch compatible
- iMatch™* compatible
- Available in 60" and 72" cutting widths
- Laminated tires
- CAT 4 driveline with slip clutch protection

Who Should Buy:

Farms, Ranches,
Homesteads



*iMatch™ is a trademark of Deere and Company.

Twister 30 Series®

Single-Spindle Rotary Cutter | **TW35** | **TW36**

Standard Equipment & Specifications

| | TW35 | TW36 |
|--|--|--|
| Cutting Width | 60" | 72" |
| Overall Width | 66 1/2" | 78 1/2" |
| Overall Length | 105" | 121" |
| Cutting Height (Min) | 1 1/2" | 1 1/2" |
| Hitch | CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™* | CAT 1/CAT 2 Std., CAT 1/CAT 2 Q.H., iMatch™* |
| Blade Carrier | Infinity - Cast | Infinity - Cast |
| Blades | 1/2" x 4" Updraft | 1/2" x 4" Updraft |
| PTO HP Required (Min) | 35 | 45 |
| Gearbox Rating** | 130 HP | 130 HP |
| Blade tip Speed (FPM) | 14,497 | 14,854 |
| Cutting Capacity | 3" | 3" |
| Driveline Size | CAT 4 | CAT 4 |
| Driveline Protection | Slip Clutch | Slip Clutch |
| Deck Thickness | 10 Ga | 10 Ga |
| Side Skirt | 1/4" | 1/4" |
| Tire and Wheel | Laminated | Laminated |
| Safety Deflector | Deflectors or Chains | Deflectors or Chains |
| Weight (Approx) -with Rubber Deflectors | 920 lbs | 1075 lbs |
| Weight (Approx) -with Chains | 975 lbs | 1140 lbs |

* iMatch™ is a trademark of Deere & Company

** Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

400 Series[®]

Single-Spindle Rotary Cutter | **472** | **484**

Clean cut and high performance in heavy mowing applications.

RhinoAg's 400 Series rotary cutters are built for tough jobs. A 4 ½"-diameter cut capacity and deep reinforced domed deck design handle higher volumes of cut material easily. The 210 HP gearbox rating with 5-year limited warranty and durable full-length, full-width deck bracing ensures a long life. The streamlined bracing under the deck maintains material flow through the cutting chamber.

Its durability extends the ¼" x 11" side skirts with ½"-thick material at the impact zone to defend against extra abuse. The cross-braced round pan blade carrier overlaps the gearbox output shaft seal to protect it from cut material, providing excellent durability in heavy mowing applications.

Features & Benefits

- CAT 5 driveline with slip clutch protection
- 7-gauge deck thickness
- ½" x 4" updraft blades
- High blade tip speeds to provide a clean cut in heavy mowing applications

Who Should Buy:

Farms, Ranches, Roadside Maintenance,

Maintaining Overgrowth,

Clearing Areas for
Future Development,

Upkeep of Recreational
Areas



400 Series[®]

Single-Spindle Rotary Cutter | 472 | 484

| | 472 | 484 |
|-------------------------|------------------------------|--------------------------------------|
| Cutting Width | 72" | 84" |
| Overall Width | 79 1/2" | 90 1/2" |
| Overall Length | 121" | 138 1/2" Lift 154 1/2" Pull |
| Min Cutting Height | 1 1/2" | 1 1/2" |
| Hitch* | CAT I & 2* / CAT 1 & 2 QH | CAT 2 & 3 / Cat 1, 2 & 3 QH |
| Blade Carrier | Reinforced Pan | Reinforced Pan |
| Blades | 1/2" x 4" Updraft | 1/2" x 4" Updraft |
| Min PTO HP Required | 55 | 60 Lift 50 Pull |
| Gearbox Rating** | 210 HP | 210 HP |
| Gearbox Oil (85W-140) | Factory Filled | Factory Filled |
| Output Shaft Diameter | 2 3/8" | 2 3/8" |
| PTO Type | 540 RPM | 540 RPM |
| Blade Tip Speed (FPM) | 16,286 | 15,675 |
| Cutting Capacity (Max.) | 4 1/2" | 4 1/2" |
| Driveline Size | CAT 5 | CAT 5 |
| Driveline Protection | Slip Clutch | Slip Clutch |
| Deck Thickness | 7 Ga. (3/16") | 7 Ga. (3/16") |
| Side Skirt | 1/4" X 11" | 1/4" X 11" |
| Tires & Wheels | Laminated | Laminated, RhinoTrax or Pneumatic |
| Safety Deflector | Single or Double Chains | Single or Double Chains |
| Weight (Approx.) | 1,560 lbs. | 1,823 lbs. |

* Requires adaptor bushing sold separately (Top Link)

** Gearbox Rating Based on Field Performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

RhinoAg: **Class B** Implements

▶ **60-100** HP Tractors

TR 200 Series[®]

Multi-Spindle Rotary Cutter | **TR208** | **TR210**

Innovative new suspension and driveline designs.

The robust TR Series is the latest addition to RhinoAg's already-impressive lineup of multi-spindle cutters. These rugged cutters offer superior cut quality, easier maintenance, and longer life expectancy to give you the years of dependable service you've come to expect from RhinoAg.

Features & Benefits

- Clean, modernized deck design for easy cleaning and maintenance
- CV drivelines on all pull-type units
- CAT 2 & 3 standard and quick hitch compatible
- Slip clutch driveline protection
- EZ cutting boxes
- Adjustable row spacing on pull type units

Who Should Buy:

Farms, Ranches, Orchards



TR 200 Series®

Multi-Spindle Rotary Cutter | TR208

Standard Equipment & Specifications

| | TR208 | TR210 |
|----------------------------|--|--|
| Cutting Width | 96" | 120" |
| Overall Width | 103" | 127 1/4" |
| Overall Length | 91" (Lift) 138" (Pull) | 106 1/2" (Lift) 149 1/2" (Pull) |
| Cutting Height | 1" – 16" | 1" – 15" |
| Height Adjustment | 2.5"x8" Cylinder (Pull) | 2.5" X 8" Cylinder (Pull) |
| Jack Stand | Std (Pull) | Std (Pull) |
| Hitch | CAT 2/ CAT 3 Std., CAT 2/ CAT 3 Q.H., Pull | CAT 2/ CAT 3 Std., CAT 2/ CAT 3 Q.H., Pull |
| Blade Carrier | Infinity - Steel | Infinity - Steel |
| Blades | 1/2" x 3" Parallel Updraft | 1/2" x 3" Parallel Updraft |
| Blade Overlap | 4" | 4" |
| Horsepower Required | 45 (Lift) 30 (Pull/Semi) | 60 (Lift) 45 (Pull) |
| Gearbox Rating | Center: 100 HP Outboard: 65 HP | Center: 100 HP Outboard: 130 HP |
| Gearbox Oil - 85W-140 | Factory Filled Lucas Oil | Factory Filled Lucas Oil |
| Output Shaft Diameter | 1 9/16" | |
| Blade Tip Speed - 540 RPM | 14,661 FPM | 16,969 FPM |
| Blade Tip Speed - 1000 RPM | N/A | 16,694 FPM (Lift Type Only) |
| Cutting Capacity | 2" | 2" |
| Driveline Size - 540 RPM | Cat 4 (Lift main) Cat 4 (Pull main) | Cat 4 (Lift main) Cat 4 (Pull main) |
| Driveline Size - 1000 RPM | N/A | Cat 4 (Lift main) |
| Driveline Protection | Slip Clutch (main, jackshaft) | Slip Clutch (main, jackshaft) |
| Deck Thickness | 12 GA | 12 GA |
| Side Skirt | 7 GA | 7 GA |
| Tires and Wheels | Laminate (Lift) Laminate, Rhino Trax (Pull) | Laminate (Lift), Laminate, Rhino Trax (Pull) |
| Safety Tow Chain | Std (Pull) | Std (Pull) |



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

* Gearbox power ratings based on actual field performance

TR 300 Series[®]

Innovative new suspension and driveline design.

The TR300 pull types feature a rigid-deck suspension system that creates a more even cut and offers longer part life due to reduced impact load on critical components. As heavier units, the TR308 and TR310 need this independent axle suspension to help reduce the hard, continuous impacts that cutters see out in the field daily.

Features & Benefits

- Clean, modernized deck design for easy cleaning and maintenance
- CV drivelines on all pull-type units
- CAT 2 & 3 hitch compatible
- Slip clutch driveline protection
- Adjustable row spacing on pull type units

Who Should Buy:

Farms, Ranches,
Demanding Agricultural
Maintenance



TR 300 Series[®]

Multi-Spindle Rotary Cutter | **TR308** | **TR310**

Standard Equipment & Specifications

| | TR308 | TR310 |
|----------------------------|--|--|
| Cutting Width | 96" | 120" |
| Overall Width | 103" | 127 1/4" |
| Overall Length | 94 1/2" (Lift) 97 1/2" (Semi) 143" (Pull) | 107 1/4" (Lift) 155" (Pull) |
| Cutting Height | 1" – 15" | 1" – 15" |
| Height Adjustment | Cylinder (Pull/Semi) | Cylinder (Pull) |
| Jack Stand | Std (Pull) | Std (Pull) |
| Hitch | CAT 2/ CAT 3 Std., CAT 2/ CAT 3 O.H., Pull | CAT 2 & 3 Pull |
| Blade Carrier | Infinity - Steel | Infinity - Steel |
| Blades | 1/2" x 4" Parallel Updraft | 1/2" x 4" Parallel Updraft |
| Blade Overlap | 4" | 4" |
| Horsepower Required | 55 (Lift) 35 (Pull/Semi) | 80 (Lift) 55 (Pull) |
| Gearbox Rating | Center: 100 HP Outboard: 130 HP | Center: 210 HP Outboard: 210 HP |
| Gearbox Oil - 85W-140 | Factory Filled Lucas Oil | Factory Filled Lucas Oil |
| Output Shaft Diameter | 2" | 2 3/8" |
| Blade Tip Speed - 540 RPM | 16,512 FPM | 16,215 FPM |
| Blade Tip Speed - 1000 RPM | 16,378 FPM | 16,238 FPM |
| Cutting Capacity | 3" | 3" |
| Driveline Size | Cat 4 (Lift/Semi main) Cat 5 (Pull main) | Cat 4 (Lift main) Cat 5 (Pull main) |
| Driveline Protection | Slip Clutch | Slip Clutch |
| Deck Thickness | 10 GA | 10 GA |
| Side Skirt | 1/4" | 1/4" |
| Tires and Wheels | Laminate (Lift) Laminate, RhinoTrax (Pull/Semi) | Laminate, RhinoTrax |
| Safety Tow Chain | Std (Pull) | Std (Pull) |

* Gearbox power ratings based on actual field performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261



2150[®]

Flex-Wing Rotary Cutter

A sleek design with the same durability you expect from RhinoAg. Engineered for outstanding strength and durability, the 2150 Flex-Wing Rotary Cutter provides improved access to the splitter box for ease of maintenance; greater access to service areas; smooth, quiet operation; and an Infinity cast carrier. The improved gearbox design, which includes a more stable driveshaft-to-blade-carrier design, offers more torque with the same horsepower than previous models.

Features & Benefits

- Smooth top and bottom deck design with dual cut chambers
- New composite divider shield
- Mechanical level lift
- Infinity cast carrier
- New improved tongue design features standard clevis
- CAT 5 CV main and CAT 4 wing drivelines
- Coil spring suspension
- LED lights

Who Should Buy:

General Mowing,
Pasture Maintenance,
Roadside & Right-of-Way Mowing,
Farm Use,
Commercial Mowing,
Industrial Mowing



2150[®]


Flex-Wing Rotary Cutter

Standard Equipment & Specifications

| | 2150 |
|---------------------------------|---|
| Cutting Width | 180" |
| Transport Width | 116" |
| Transport Height | 75" |
| Overall Width | 187" |
| Overall Length | 172" |
| Cutting Height* | 2"-14" |
| Height Adjustment | 2 1/2" x 8" Hydraulic Cylinder |
| Hydraulic Hose Ends | Standard |
| Jack Stand | Standard |
| Hitch | Clevis |
| Blade Carrier | Infinity |
| Blades | 1/2" x 4" Parallel Updraft |
| Blade Overlap | 6" |
| Horsepower Required | 50 HP |
| Gearbox Rating Divider ** | 160 HP |
| Gearbox Rating Center & Wing ** | 130 HP |
| Gearbox Oil (85W-140) | Factory Filled |
| Output Shaft Diameter | 2" |
| Blade Tip Speed Center | |
| Center 540 RPM | 14,861 FPM |
| Center 1000 RPM | 15,570 FPM |
| Wing 540 RPM | 14,861 FPM |
| Wing 1000 RPM | 15,776 FPM |
| Cutting Capacity | 2 1/2" |
| Driveline Size Main | Cat 5 CV |
| Driveline Size Wing | Cat 4 |
| Driveline Protection | Slip Clutch |
| Deck Thickness Center | 10 Ga. (Top), 7 Ga. (Bottom) |
| Deck Thickness Wing | 10 Ga. (Top & Bottom) |
| Side Skirt | 1/4" x 12 3/8" |
| Tire Selections | Rhino Trax, Foam Filled, Laminated, or Pneumatic (4, 6, or 8 Tires) |
| Wing Lift | Mechanical Level Lift |
| Wing Flex | 25° Down/ 87° Up, |
| Operational Wing Flex | 25° Down/ 45° Up |
| Weight (Approx.) | 4,290 lbs. (w/ Single Chains & 6 Rhino Trax Tires) |
| Tongue Weight | 1,430 lbs. |
| Safety Tow Chain | Standard |
| LED Light Kit | Standard |
| Safety Deflectors | Deflectors, Chains, or Combination |

* Cutting height dependent on tire size

** Gearbox power ratings based on actual field performance

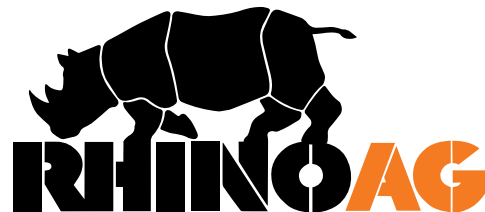

www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

3000 Apex Series®

Flex-Wing Rotary Cutter | **3100** | **3150**

Versatility and durability at an incredible price. The 3000 or "Apex" Series Flex-Wing cutters use a ½" x 4" blade to make quick work of grass and brush up to 3" in diameter. These smaller cutters only require 50 horsepower from your tractor, so this is the unit for everyone: from full-time ranchers to weekend hobbyists. The Apex Series cutters are designed with slip-clutch protection and hydraulic wing lift.

Features & Benefits

- Smooth domed deck that's easier to clean with a larger cutting chamber
- 10-gauge deck thickness
- Infinity blade carrier for strong, durable stump jumping
- Locking clevis pivot hitch device for easy hookup
- Simple independent suspension for less maintenance
- Standard safety-tow chains
- 4 optional wheel configurations
- Durable LED light kit
- 6-year gearbox warranty

Who Should Buy:

General Mowing, Pasture Maintenance, Shredding Crops and Stalks, Roadside and Right-of-Way Mowing, Commercial Mowing, Farm Use, Heavy-Duty Agriculture Use, Industrial Mowing



3000 Apex Series®

Flex-Wing Rotary Cutter | **3100** | **3150**

Standard Equipment & Specifications

| | 3100 | 3150 |
|------------------------------------|---------------------------------------|---------------------------------------|
| Cutting Width | 126" | 180" |
| Transport Width * | 88" | 96" |
| Transport Height * | 80" | 80" |
| Overall Width * | 133" | 187" |
| Overall Length * | 176" | 176" |
| Cutting Height * | 2"-14" | 2"-14" |
| Height Adjustment | Hydraulic Cylinder | Hydraulic Cylinder |
| Hydraulic Hose Ends | Standard | Standard |
| Jack Stand | Standard | Standard |
| Hitch | Pull | Pull |
| Blade Carrier | Infinity | Infinity |
| Blades | 1/2" x 4" Parallel Updraft | 1/2" x 4" Parallel Updraft |
| Blade Overlap | 6" | 6" |
| PTO Horsepower Required | 50 HP | 50 HP |
| Gearbox Rating - Divider** | 160 HP | 160 HP |
| Gearbox Rating - Center and Wing** | 110 HP | 130 HP |
| Gearbox Oil - 85W-140 | Factory Filled | Factory Filled |
| Output Shaft Diameter | 2" | 2" |
| Blade Tip Speed - Center 540 RPM | 14,861 FPM | 14,861 FPM |
| Blade Tip Speed - Center 1000 RPM | 15,570 FPM | 15,570 FPM |
| Blade Tip Speed - Wing 540 RPM | 14,861 FPM | 14,861 FPM |
| Blade Tip Speed - Wing 1000 RPM | 15,776 FPM | 15,776 FPM |
| Cutting Capacity | 3" | 3" |
| Driveline Size - Main | Cat 4 CV | Cat 4 CV |
| Driveline Size - Wing | Cat 4 | Cat 4 |
| Driveline Protection | Slip Clutch | Slip Clutch |
| Deck Thickness | 10 GA | 10 GA |
| Side Skirt | 1/4" x 9 5/8" | 1/4" |
| Tires and Wheels | Rhino Trax, Foam Filled, or Laminated | Rhino Trax, Foam Filled, or Laminated |
| Wing Lift Hydraulics | Standard | Standard |
| Wing Flex | 90° Up/ 25° Down | 90° Up/ 25° Down |
| Operational Wing Flex | 45° Up/ 25° Down | 45° Up/ 25° Down |
| Safety Tow Chain | Standard | Standard |
| LED Light Kit | Standard | Standard |
| Safety Deflectors | Rubber Deflectors or Chain Guard | Rubber Deflectors or Chain Guard |
| Tongue Weight | 1,790 lbs | 1,610 lbs |
| Weight (Approx) | 4,830 lbs | 5,190 lbs |

* Dependent on tire size

** Gearbox power ratings based on actual field performance



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

RhinoAg: **Class B** Implements

▶ **60-100** HP Tractors



www.rhinoag.com

1020 S. Sangamon Ave.

Gibson City, IL 60936

217-784-4261

4000 Epic Series®

Flex-Wing Rotary Cutter | **4105** | **4150** | **4155**

Everything you love about the Apex Series—taken up a notch. The 4000 “Epic” Series rotary cutters boost the horsepower requirement to 60 and the cut capacity to 4” for the 4150 and 4.5” for the 4105 and 4155. The stronger gearbox is tested up to 250 horsepower, while the whole unit is protected by safety chains. Couple that with slip-clutch protection and hydraulic wing lift and you’ve got a monster rotary cutter not to be taken lightly.

Features & Benefits

- 7-gauge deck thickness
- Chain guard safety protectors
- 3 optional wheel configurations
- 6-year gearbox warranty

Who Should Buy:

General Mowing, Pasture Maintenance,
Shredding Crops and Stalks,
Roadside and Right-of-Way Mowing,
Commercial Mowing,
Farm Use, Heavy-Duty
Agriculture Use,
Industrial Mowing



4000 Epic Series®

Flex-Wing Rotary Cutter | **4105** | **4150** | **4155**

Standard Equipment & Specifications

| | 4105 | 4150 | 4155 |
|----------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Cutting Width | 126" | 180" | 180" |
| Transport Width * | 88" | 96" | 96" |
| Transport Height * | 80" | 80" | 80" |
| Overall Width * | 133" | 187" | 187" |
| Overall Length * | 183" | 183" | 183" |
| Cutting Height * | 2"-14" | 2"-14" | 2"-14" |
| Self-Leveling Height Adjustment | Standard - Pull | Standard - Pull | Standard - Pull |
| Hydraulic Hose Ends | Standard | Standard | Standard |
| Jack Stand | Standard | Standard | Standard |
| Hitch | Pull | Pull | Pull |
| Blade Carrier | Infinity | Infinity | Infinity |
| Blades | 1/2" x 4" Parallel Updraft | 1/2" x 4" Parallel Updraft | 1/2" x 4" Parallel Updraft |
| Blade Overlap | 6" | 6" | 6" |
| PTO Horsepower Required | 60 HP | 60 HP | 60 HP |
| Gearbox Rating - Divider** | 250 HP | 250 HP | 250 HP |
| Gearbox Rating - Center & Wing** | 225 HP | 225 HP | 225 HP |
| Gearbox Oil (85W-140) | Factory Filled | Factory Filled | Factory Filled |
| Output Shaft Diameter | 3" | 3" | 3" |
| Blade Tip Speed - 540 RPM | 16,286 FPM (Center) | 16,286 FPM (Center) | 16,286 FPM (Center) |
| Blade Tip Speed - 1000 RPM | 16,380 FPM (Center) | 16,380 FPM (Center) | 16,380 FPM (Center) |
| Blade Tip Speed - 540 RPM | 16,422 FPM (Wing) | 16,422 FPM (Wing) | 16,422 FPM (Wing) |
| Blade Tip Speed - 1000 RPM | 15,983 FPM (Wing) | 15,983 FPM (Wing) | 15,983 FPM (Wing) |
| Cutting Capacity | 4 1/2" | 4" | 4 1/2" |
| Driveline Size - Main | Lube 4 Life Cat 5 CV | Lube 4 Life Cat 5 CV | Lube 4 Life Cat 5 CV |
| Driveline Size - Wing | Cat 5 | Cat 4 | Cat 5 |
| Driveline Protection | Slip Clutch | Slip Clutch | Slip Clutch |
| Deck Thickness | 7 GA | 7 GA | 7 GA |
| Side Skirt | 1/4" | 1/4" | 1/4" |
| Wheel Hubs | Greasable/ Serviceable | Service Free | Greasable/ Serviceable |
| Tires & Wheels | Rhino Trax, Foam Filled, or Laminated | Rhino Trax, Foam Filled, or Laminated | Rhino Trax, Foam Filled, or Laminated |
| Wing Lift Hydraulics | Standard | Standard | Standard |
| Wing Flex | 90° Up/ 25° Down | 90° Up/ 25° Down | 90° Up/ 25° Down |
| Operational Wing Flex | 45° Up/ 25° Down | 45° Up/ 25° Down | 45° Up/ 25° Down |
| Safety Tow Chain | Standard | Standard | Standard |
| LED Light Kit | Standard | Standard | Standard |
| Safety Deflectors | Single or Double Chains | Single or Double Chains | Single or Double Chains |
| Tongue Weight | | 1,840 lbs | 1,870 lbs |
| Weight (Approx) | 5,400 lbs | 5,395 lbs | 5,455 lbs |

* Dependent on tire size

**Gearbox power ratings based on actual field performance

RhinoAg: **Class B** Implements

▶ **60-100** HP Tractors



www.rhinoag.com

1020 S. Sangamon Ave.

Gibson City, IL 60936

217-784-4261

5000 Icon Series®

Flex-Wing Rotary Cutter | **5100** | **5150**

No brush is safe when you're running the Icon Series.

The 5000 Series rotary cutters are bigger machines that demand bigger tractors with a minimum of 70 horsepower. All that power allows the Icon to cut brush up to 5" in diameter. Slip clutch protection and strong, sturdy chain guards keep both you and your cutter safe on the job. With a 250 horsepower gearbox and a CAT 6 CV driveline, the 5000 Series is not to be trifled with.

Features & Benefits

- 1/4" deck thickness
- 1/2" x 5" blades with 6" overlap
- Infinity blade carrier
- 6-year gearbox warranty

Who Should Buy:

General Mowing,
Pasture Maintenance,
Shredding Crops and Stalks,
Roadside and Right-of-Way
Mowing, Commercial Mowing,
Farm Use, Heavy-Duty
Agriculture Use, Industrial
Mowing




5000 Icon Series®

Flex-Wing Rotary Cutter | **5100** | **5150**

Standard Equipment & Specifications

| | 5100 | 5150 |
|-------------------------|---------------------------------------|---------------------------------------|
| Cutting Width | 126" | 180" |
| Transport Width* | 88" | 96" |
| Transport Height* | 80" | 80" |
| Overall Width* | 133" | 187" |
| Overall Length* | 187" | 183" |
| Cutting Height* | 2"-14" | 2"-14" |
| Height Adjustment | Hydraulic Cylinder | Hydraulic Cylinder |
| Hydraulic Hose Ends | Standard | Standard |
| Jack Stand | Standard | Standard |
| Hitch | Pull | Pull |
| Blade Carrier | Infinity | Infinity |
| Blades | 1/2" x 5" Parallel Updraft | 1/2" x 5" Parallel Updraft |
| Blade Overlap | 6" | 6" |
| PTO Horsepower Required | 70 HP | 70 HP |
| Gearbox Rating | | |
| Divider ** | 250 HP | 250 HP |
| Center & Wing ** | 225 HP | 225 HP |
| Gearbox Oil (85W-140) | Factory Filled | Factory Filled |
| Output Shaft Diameter | 3" | 3" |
| Blade Tip Speed | | |
| Center 540 RPM | 13,436 FPM | 13,436 FPM |
| Center 1000 RPM | 13,704 FPM | 13,704 FPM |
| Wing 540 RPM | 13,169 FPM | 13,169 FPM |
| Wing 1000 RPM | 13,367 FPM | 13,367 FPM |
| Cutting Capacity | 5" | 5" |
| Driveline Size | | |
| Main | Cat 6 CV | Cat 6 CV |
| Wing | Cat 6 | Cat 6 |
| Driveline Protection | Slip Clutch | Slip Clutch |
| Deck Thickness | 1/4" | 1/4" |
| Side Skirt | 1/4" | 1/4" |
| Tires & Wheels | Rhino Trax, Foam Filled, or Laminated | Rhino Trax, Foam Filled, or Laminated |
| Wing Lift Hydraulics | Standard | Standard |
| Wing Flex | 90° Up/ 25° Down | 90° Up/ 25° Down |
| Operational Wing Flex | 45° Up/ 25° Down | 45° Up/ 25° Down |
| Safety Tow Chain | Standard | Standard |
| LED Light Kit | Standard | Standard |
| Safety Deflectors | Single or Double Chains | Single or Double Chains |
| Tongue Weight | | 1,970 lbs |
| Weight (Approx) | | 5,635 lbs |

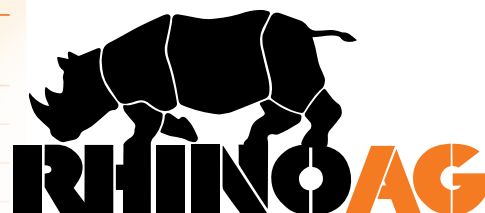

www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

* Dependent on tire size.

**Gearbox power ratings based on actual field performance

6000 Series®

Flex-Wing Rotary Cutter | **6140** | **6200**

One of the strongest and easiest to clean cutters in the industry. Perfect for mowing heavy grass and weeds, RhinoAg's new 6000 Series provides a great cut. The divider gearbox is rated at 250 horsepower, while the outboard boxes are rated at 225 HP.

Category 6 CV main drive and Category 6 wing drivelines are standard with a 2-year limited driveline warranty. The smooth top center deck is one of the strongest and easiest to clean in the industry, and the unobstructed underside of the deck provides enhanced airflow in the cutting chamber to distribute cut material evenly.

Features & Benefits

- Available with 540 or 1000 RPM drivelines
- Cuts brush up to 4½" in diameter
- Fast blade tip speeds for a clean cut in heavy conditions
- Standard deck rings
- Various blade carrier choices to fit your needs
- 6-year limited gearbox warranty

Who Should Buy:

Heavy Commercial Mowers,
Heavy Industrial Mowers,
Heavy Agricultural Mowers,
Large Hay Farming Operations



6000 Series[®]

Flex-Wing Rotary Cutter | 6140 | 6200

Standard Equipment & Specifications

| | 6140 | 6200 |
|-----------------------------------|---------------------------------------|---------------------------------------|
| Cutting Width | 162" | 240" |
| Transport Width | 106" | 115" |
| Transport Height | 100" | 100" |
| Overall Width | 170" | 248" |
| Overall Length | 216" | 216" |
| Cutting Height * | 2" - 16" | 2" - 16" |
| Height Adjustment | Hydraulic Cylinder | Hydraulic Cylinder |
| Hydraulic Hose Ends | Standard | Standard |
| Jack Stand | Standard | Standard |
| Hitch | Pull | Pull |
| Blade Carrier | Wing Pan or Oval Pan | Wing Pan, Oval Pan, or Shredder Bar |
| Blades | 1/2" x 4" | 1/2" x 4" Updraft |
| Blade Types Available | Parallel Updraft | Parallel Updraft, Flat |
| Blade Overlap | 6" | 6" |
| HP Required | 80 PTO | 80 PTO |
| Tractor Drawbar Load | | 2,920 lbs |
| Gearbox Rating - Divider ** | 250 HP | 250 HP |
| Gearbox Rating - Center & Wing ** | 225 HP | 225 HP |
| Gearbox Oil (85W-140) | Factory Filled | Factory Filled |
| Output Shaft Diameter | 3" | 3" |
| Blade Tip Speed (FPM) - 540 RPM | 15,675 Center/15,703 Wing | 15,675 Center/15,703 Wing |
| Blade Tip Speed (FPM) - 1000 RPM | 16,054 Center/15,804 Wing | 16,054 Center/ 15,804 Wing |
| Cut Capacity (Max) | 4 1/2" | 4 1/2" |
| Driveline Size | CAT 6 CV Main/Cat 6 HD Wing | CAT 6 CV Main/Cat 6 HD Wing |
| Driveline Protection | Slip Clutch | Slip Clutch |
| Deck Thickness | 10 Ga. Top/Bottom | 10 Ga. Top/Bottom |
| Side Skirt | 1/4" x 12" | 1/4" x 12" |
| Tire and Wheel Option | Rhino Trax, Foam Filled, or Laminated | Rhino Trax, Foam Filled, or Laminated |
| Wing Lift Hydraulics | Standard | Standard |
| Wing Flex | 90° Up/ 22° Down | 90° Up/ 22° Down |
| Operational Wing Flex | 45° Up/ 22° Down | 45° Up/ 22° Down |
| Deck Rings | Standard | Standard |
| Safety Tow Chain | Standard | Standard |
| Safety Deflector | Single or Double Chain Guards | Single or Double Chain Guards |
| LED Light Kit | Standard | Standard |



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

* Cutting height dependent on tire size.

**Gearbox power ratings based on actual field performance

DB 150[®]

Hydraulic Ditch Bank Mower

Versatile and durable. The DB150 can extend to a maximum of 158" from centerline, allowing the 60" rotary head to cut areas that are difficult or impossible to reach with ordinary mowers. To ensure a clean cut, the DB150 features updraft blades and a blade tip speed of 16,870 FPM.

Being hydraulically driven means maintenance is reduced: no belts and pulleys. The DB150 can be retracted to a width of 119" for easy transport on narrow roads and through narrow gates. The operating range of the head is 85° up and 90° down to handle many different applications.

A CAT 4 driveline is standard equipment on the DB150, allowing for easy unit hookup. The speed increaser and hydraulic pump are mounted to the frame for a secure mount and easy access to component points. The driveline is fully shielded for enhanced safety.

Features & Benefits

- Cuts brush up to 1" in diameter
- 9½' transport width
- Heavy-duty three-point hitch with double lug hitch system
- CAT 2 & 3 quick-hitch compatible with adapter kit
- Hydraulic breakaway
- 190° head movement
- Replaceable skid shoes
- Standard safety deflectors
- Driveline or PTO mounted speed increaser

Who Should Buy:

Fencerow Maintenance, Highway Mowing,
Pond and Levee Embankments,
Other Hard-to-Reach Mowing Applications



DB 150[®]

Hydraulic Ditch Bank Mower

Standard Equipment & Specifications

| | DB150 |
|----------------------------------|--|
| Cutting Width | 60" |
| Transport Width | 119" |
| Overall Width (Head) | 65 1/4" |
| Overall Length (Head) | 71 3/8" |
| Cutting Height (Min) | 1" |
| Hitch | CAT 2 & 3 QH Compatible w/Adapter Kit |
| Blade Carrier | Pan |
| Blades | 1/2" x 4" Updraft |
| Blade Rotation | Clockwise |
| HP Required | 60, with adequate front wt. |
| Tractor PTO Speed | 540 RPM |
| Oil Reservoir Capacity | 55 Gallons, factory filled |
| Max System Pressure | 3,000 PSI |
| Blade Tip Speed | 16,870 FPM |
| Horizontal Reach (Max.) | 158" from center of tractor |
| Extension Cylinder Stroke | 30" |
| Cutting Capacity (Max.) | 1" |
| Driveline Size | CAT 4 |
| Overload Protection | Relief Valve |
| Deck Thickness | 10 Ga |
| Side Skirt | 10 Ga x 9 1/4" |
| Range of Head Movement (Degrees) | 85° Up / 90° Down |
| Hydraulic Pump Capacity | 18.32 GPM |
| Skid Shoes | Replaceable |
| Safety Deflectors | Rubber Deflectors, Single Chain Guards or Double Chain Guards |
| Weight (Approx.) | 2,140 lbs. with oil |



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261

Heavy-Duty Rear Blades

Rugged durability, superior craftsmanship, and innovative design. The constant curvature and the perfect fit of the replaceable cutting edge allows RhinoAg blades to cut and roll the material rather than dragging it, saving time, horsepower, and fuel. Multiple manual adjustment settings and infinite hydraulic settings make Rhino blades some of the easiest rear blades to operate.

Features & Benefits

- Tough 1/2" x 6" replaceable cutting edges for long life
- Slightly extended cutting edge to help reduce rate of moldboard wear
- Optional gauge wheels, quick-attach end plates, and skid shoes for maximum versatility

950

- CAT 1 & 2 three-point and quick-hitch compatibility
- 3/8" x 17" moldboard
- 3" diameter solid steel cold-rolled kingpin
- 30" maximum offset
- Manual or hydraulic adjustments

1540

- CAT 2 & 3 three-point and quick-hitch compatibility
- Bolt-on gauge wheels to help control cutting depths for a smooth finish
- 1/2" x 18" moldboard
- 4"-diameter solid steel cold-rolled kingpin
- 37" maximum offset
- Manual or hydraulic adjustments

Who Should Buy:

Livestock Lot Cleaning, Ditch Work,
Building/Maintaining Roads, Snow Removal,
Terrace Building/Maintenance



Heavy-Duty Rear Blades

Standard Equipment & Specifications

| | 950 | 1540 |
|---------------------|---|--|
| Moldboard Width | 8', 9' | 8', 9', & 10' |
| Moldboard Dimension | 3/8" x 17" | 1/2" x 18" |
| Cutting Edge | 1/2" x 6" | 1/2" x 6" |
| Support Stand | Std | Std |
| Hitch | CAT 1 & 2 / CAT 1 & 2 QH | CAT 2 & 3 / CAT 2 & 3 QH |
| Maximum HP (2WD) | 8' - 125 9' - 95 | 8' - 190 9' - 175 10' - 160 |
| Maximum HP (FWA) | 8' - 106 9' - 81 | 8' - 162 9' - 149 10' - 136 |
| Kingpin Diameter | 3" Solid Steel | 4" Solid Steel |
| Adjustment Types | Manual or Hydraulic | Manual or Hydraulic |
| Offset (Max.) | 30" | 37" |
| Pivot Forward | Up to 45° | Up to 45° |
| Pivot Reverse | Up to 45° | Up to 45° |
| Tilt- Up & Down | Up to 15° | Up to 15° |
| Weight (Approx.) | 8' - 836 Lbs. 9' - 876 Lbs. | 8' - 1,712 Lbs. 9' - 1,796 Lbs. 10' - 1,880 Lbs. |
| | 2500 | 3500 |
| Moldboard Width | 8', 10', 12' | 12', 14' |
| Moldboard Dimension | 1/2" x 20" | 1/2" x 20" |
| Cutting Edge | 1/2" x 6" | 1/2" x 6" |
| Support Stand | Std | Std |
| Hitch | CAT 2 & 3 / CAT 2 & 3 QH | CAT 3 & 4 / CAT 3 & 4 QH |
| Maximum HP (2WD) | 8' - 250 10' - 225 12' - 175 | N/A |
| Maximum HP (FWA) | 8' - 220 10' - 200 12' - 160 | 12' - 300 14' - 250 |
| Kingpin Diameter | 4.5" Steel Bar | 5" Steel Bar |
| Adjustment Types | Hydraulic | Hydraulic |
| Offset (Max.) | 46" | 50" |
| Pivot Forward | Up to 45° | Up to 45° |
| Pivot Reverse | Up to 45° | Up to 45° |
| Tilt- Up & Down | Up to 15° | Up to 15° |
| Weight (Approx.) | 8' - 2,120 Lbs. 10' - 2,260 Lbs. 12' - 2,400 Lbs. | 12' - 3,463 Lbs. 14' - 3,603 Lbs. |



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261



www.rhinoag.com

1020 S. Sangamon Ave.
Gibson City, IL 60936

217-784-4261