


RhinoAg: Turf Mowers

R SERIES



Ideal for golf courses, sod farms, polo clubs, and local government

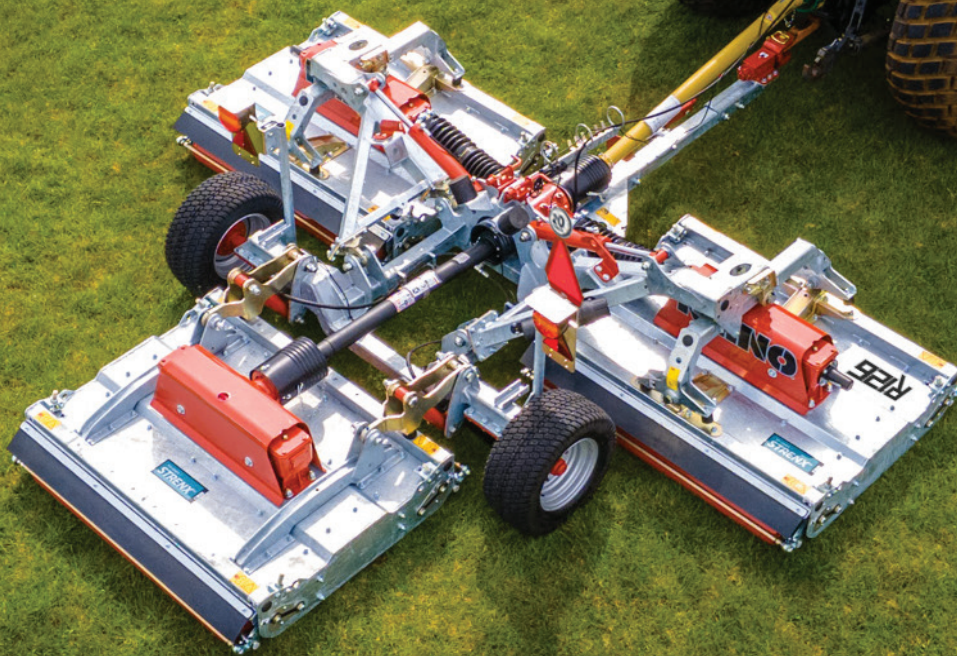

Zero turn capability allows tight turns or mowing around obstacles without turf damage



Sealed internal roller bearings for total protection against moisture, soil, and debris



Body produced from 8 gauge Strenx® 700MC and hot dipped galvanized for longer machine life



Simple height adjustment from 1/2" - 4 1/2" for versatile and year-round mowing



100% gear driven, no belts to adjust or replace



Full-length rollers follow the ground contour, prevent scalping, and produce perfect stripes



Unique pivoting frame with self-aligning spherical bearings allow the mowing decks to follow the ground contours with ease

RhinoAg: Specifications

R SERIES

Specifications

	R126
Cutting Width	12' 2" (146")
Transport Width	90"
Transport Height	75"
Overall Length	118"
Cutting Height	Up to 4½"
Hitch	Pull-type
Blade Carrier	3¼" x 3/8" spring steel, hardened and tempered
No. of Blades	24
Blades	3" x 3/16" spring steel ground edged parallel hardened and tempered, pivoting on high tensile pivot bush assembly
Rotors	6
Mowing Rates	10 acres/hr @ 7mph
Blade Overlap	4¼"
PTO HP Required (Min)	40 HP
Tractor PTO	540 RPM
Output Shaft Diameter	1½" (40mm)
Gearbox Oil	85W-140 factory lled
Blade Tip Speed	14,930 FPM
Drivelines	1 3/8" 6-spline 2300 series wide angle shaft with slip clutch
Deck Thickness	8 gauge Strenx® 700MC folded structural steel with reinforcement panel in 8 gauge Strenx® 700MC
Tire	BKT LG306 wheel 23x10.5, 12-ply rating
LED Light Kit	Standard
Weight	3,075 lb.

**ROLLER BEARINGS**

Sealed internal roller bearings offer total protection against moisture, soil, and debris.

**LONG-LASTING BLADES**

Produced from ¼" sprung steel to offer hours of continuous work without needing to sharpen.

**STRENX**

High-performance 700MC structural steel.

